

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property
Organization
International Bureau**



(43) International Publication Date
4 March 2004 (04.03.2004)

(10) International Publication Number
WO 2004/018823 A3

(51) International Patent Classification⁷: E21B 23/00,
F16L 25/00

[US/US]; 19115 Prospect Ridge Lane, Houston, TX 77094 (US). RING, Lev [RU/US]; 14126 Heatherhill Place, Houston, TX 77077 (US). COSTA, Scott [US/US]; 2011 Willow Point, Kingwood, TX 77330 (US).

(21) International Application Number: PCT/US2003/025676

(74) Agents: MATTINGLY, Todd et al.; Haynes and Boone, LLP, 1000 Louisiana Street, Suite 4300, Houston, TX 77002-5012 (US).

(22) International Filing Date: 18 August 2003 (18.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/405,394 23 August 2002 (23.08.2002) US

(71) Applicant (for all designated States except US): ENVENTURE GLOBAL TECHNOLOGY [US/US]; 16200 A Park Row, Houston, TX 77084 (US).

(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

(72) Inventors; and

(75) Inventors/Applicants (for US only): SHUSTER, Mark

[Continued on next page]

(54) Title: INTERPOSED JOINT SEALING LAYER METHOD OF FORMING A WELLBORE CASING

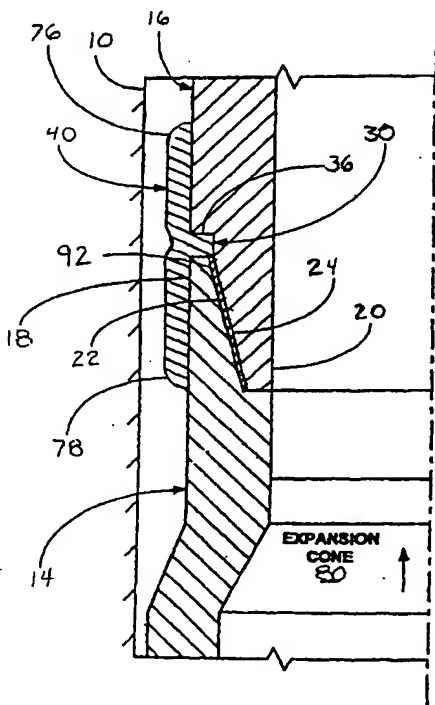

(57) Abstract: A method of forming a wellbore casing within a borehole (10) that traverses a subterranean formation, is provided by assembling a tubular liner by coupling a multi-layer tubular insert (92) threaded portion (24) of a first tubular member (16), and coupling a threaded portion (22) of a second tubular member (14) to the threaded portions (24) of the first (16) tubular member and the multi-layer tubular insert (92). the tubular liner assembly is positioned within the borehole (10); and the tubular liner assembly within the borehole (10) is radially expanded and plastically deformed. The multi-layer tubular insert (92) includes a first tubular insert having a first modulus of elasticity; and a second tubular insert coupled to the first tubular insert having a second modulus of elasticity. The first modulus of elasticity is different from the second modulus of elasticity.

WO 2004/018823 A3